




# 112mm

MONTANTE (S) / SUPPORT (S) / HALTERUNG (S)

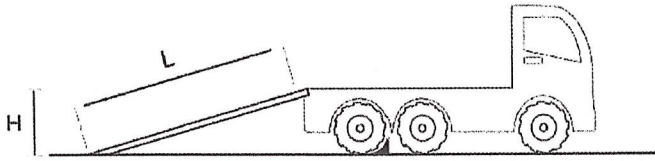


Tipo / Type / Typ  
10 - 11



Tipo / Type / Typ  
00 - 01

MONTANTE (S) 112 mm / SUPPORT (S) 112 mm / HALTERUNG (S) 112 mm

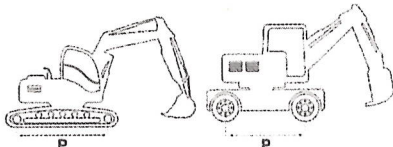CODICE PART NUMBER ARTIKELNUMMER	L (mm) LUNGHEZZA LENGTH LÄNGE	PESO (Kg/coppia) WEIGHT (Kg/pair) GEWICHT (Kg/Paar)	P (mm) = passo / axle distance / Radstand			C (mm) LARGH. INTERNA INTERNAL WIDTH INNERE BREITE	A (mm) LARGH. ESTERNA EXTERNAL WIDTH ÄUSSERE BREITE	B (mm) ALTEZZA BORDO CURBS THICK. RANDHÖHE
			 Portata max alla coppia (Kg) Max machine weight calculated on a ramp pair (Kg) Max. Tragfähigkeit des Paares (Kg)					
<b>VERSIONE CON BORDO / CURBS TYPE / VERSION MIT RAND - [TIPO / TYPE / TYP 10]</b>								
			1000	1250	1500			
UEL1125S10	2,500	42	3730	4000	4000	300	352	45
UEL1130S10	3,000	47	2790	3190	3725	300	352	45
UEL1132S10	3,200	49	2540	2865	3285	300	352	45
UEL1135S10	3,500	51	2220	2470	2780	300	352	45
UEL1140S10	4,000	55	1830	2000	2200	300	352	45
UEL1130L10	3,000	51	2790	3190	3725	330	382	45
UEL1132L10	3,200	53	2540	2865	3285	330	382	45
UEL1135L10	3,500	55	2220	2470	2780	330	382	45
UEL1140L10	4,000	59	1830	2000	2200	330	382	45
<b>VERSIONE SENZA BORDO / NO CURBS TYPE / VERSION OHNE RAND - [TIPO / TYPE / TYP 00]</b>								
			1000	1250	1500			
UEL1125S00	2,500	42	3730	4000	4000	-	352	-
UEL1130S00	3,000	47	2790	3190	3725	-	352	-
UEL1132S00	3,200	49	2540	2865	3285	-	352	-
UEL1135S00	3,500	51	2220	2470	2780	-	352	-
UEL1140S00	4,000	55	1830	2000	2200	-	352	-
UEL1130L00	3,000	51	2790	3190	3725	-	382	-
UEL1132L00	3,200	53	2540	2865	3285	-	382	-
UEL1135L00	3,500	55	2220	2470	2780	-	382	-
UEL1140L00	4,000	59	1830	2000	2200	-	382	-