






135mm

MONTANTE (S) / SUPPORT (S) / HALTERUNG (S)

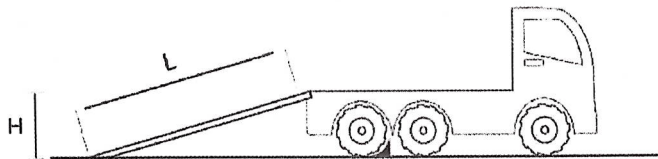

Tipo / Type / Typ
10 - 11



Tipo / Type / Typ
00 - 01

MONTANTE (S) 127 mm / SUPPORT (S) 127 mm / HALTERUNG (S) 127 mm

CODICE PART NUMBER ARTIKELNUMMER	L (mm) LUNGHEZZA LENGTH LÄNGE	PESO (Kg/coppia) WEIGHT (Kg/pair) GEWICHT (Kg/Paar)	P (mm) = passo / axle distance / Radstand			C (mm) LARGH. INTERNA INTERNAL WIDTH INNERE BREITE	A (mm) LARGH. ESTERNA EXTERNAL WIDTH ÄUSSERE BREITE	B (mm) ALTEZZA BORDO CURBS THICK. RANDHÖHE
			 Portata max alla coppia (Kg) Max machine weight calculated on a ramp pair (Kg) Max. Tragfähigkeit des Paares (Kg)					
VERSIONE CON BORDO / CURBS TYPE / VERSION MIT RAND - [TIPO / TYPE / TYP 10]								
			1000	1500	2000			
UEL1330S10	3000	66	4670	5950	6300	344	394	36
UEL1332S10	3200	68	4200	5250	5850	344	394	36
UEL1335S10	3500	74	3660	4460	5300	344	394	36
UEL1340S10	4000	83	3020	3560	4250	344	394	36
UEL1330L10	3000	71	4660	4950	4950	392	442	36
UEL1332L10	3200	72	4200	4950	4950	392	442	36
UEL1335L10	3500	80	3670	4460	4960	392	442	36
UEL1340L10	4000	87	3020	3560	4250	392	442	36
VERSIONE SENZA BORDO / NO CURBS TYPE / VERSION OHNE RAND - [TIPO / TYPE / TYP 00]								
			1000	1500	2000			
UEL1330S00	3000	66	4670	5950	6300	-	394	-
UEL1332S00	3200	68	4200	5250	5850	-	394	-
UEL1335S00	3500	74	3660	4460	5300	-	394	-
UEL1340S00	4000	83	3020	3560	4250	-	394	-
UEL1330L00	3000	71	4660	4950	4950	-	442	-
UEL1332L00	3200	72	4200	4950	4950	-	442	-
UEL1335L00	3500	80	3670	4460	4960	-	442	-
UEL1340L00	4000	87	3020	3560	4250	-	442	-

Possibilità di montare la gomma su richiesta.
Possibility to get the ramp with rubber, on request.
Möglichkeit, die Rampe mit Gummi zu bekommen, auf Anfrage.